



EFFER 210




2S




3S

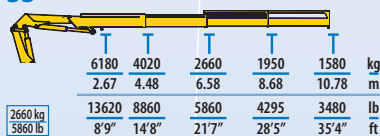

4S

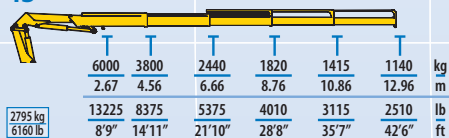

5S

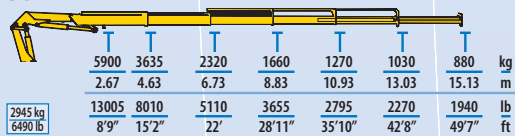


Standard



MODEL							
	txm	(°)	mm	mm	mm	mm	t
2S	18,94	400	2375	2485	990	5050 5700	18
3S	18,02	400	2375	2485	990	5050 5700	18
4S	17,32	400	2375	2485	990	5050 5700	18
5S	16,85	400	2375	2485	1160	5050 5700	18


MODEL							
	lb*ft	(°)	in	in	in	in	lb
2S	137040	400	94	98	39	199 224	39700
3S	130380	400	94	98	39	199 224	39700
4S	125320	400	94	98	39	199 224	39700
5S	121920	400	94	98	46	199 224	39700

6S

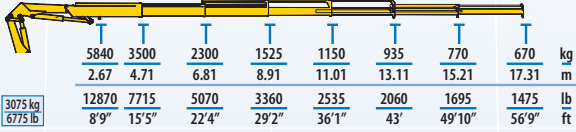


3075 kg
6775 lb


2S+JIB 2S

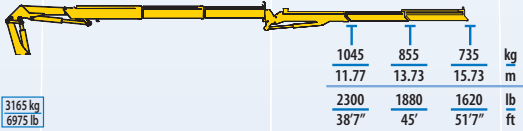


3165 kg
6975 lb




3S+JIB 2S

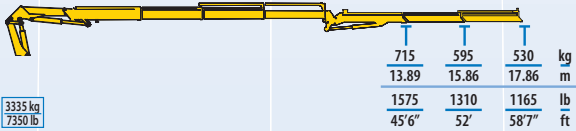


3335 kg
7350 lb



4S+JIB 2S

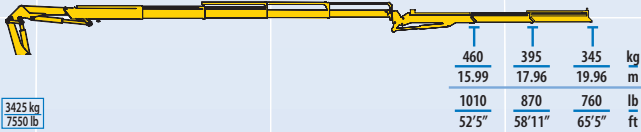

3425 kg
7550 lb



Optional



MODEL							
	txm	(°)	mm	mm	mm	mm	t
6S	16,49	400	2375	2485	1160	5050 5700	18
2S+JIB 2S	18,94	400	2540	2485	1080	5050 5700	18
3S+JIB 2S	18,02	400	2540	2485	1080	5050 5700	18
4S+JIB 2S	17,32	400	2540	2485	1080	5050 5700	18

MODEL							
	lb*ft	(°)	in	in	in	in	lb
6S	119310	400	94	98	46	199 224	39700
2S+JIB 2S	137040	400	100	98	43	199 224	39700
3S+JIB 2S	130380	400	100	98	43	199 224	39700
4S+JIB 2S	125320	400	100	98	43	199 224	39700